


MCE-LETEK-LAY-001 Rev 1 - 17 Sep 2026 - PRELIMINARY, FOR SITE PLANNING ONLY


Dryer train outline taken from the MCE 8 ft x 40 ft dryer general arrangement; all other items are block estimates.



Side elevation, area schedule and utility summary

Elevation from the MCE 8 ft x 40 ft dryer general arrangement, 1 in = 15 ft.

MCE-LETEK-LAY-001 Rev 1 - 17 Sep 2026 - PRELIMINARY, FOR SITE PLANNING ONLY

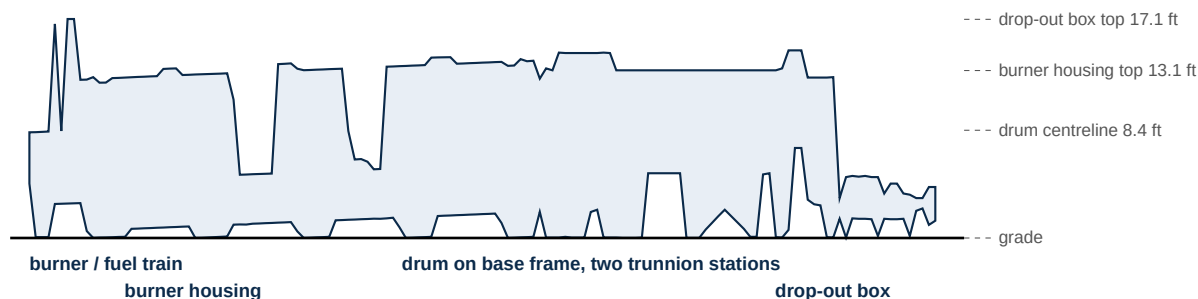

Area	sq ft	sq m	Notes
Dryer train: burner and fuel train, burner housing, feed breeching, 8 ft x 40 ft drum, drop-out box (from drawing 104400900)	1,168	109	79 ft long x 15 ft wide overall; drop-out box top 17 ft, drum centreline 8.4 ft above grade
Cyclone and exhaust fan	112	10	cyclone approx. 22 ft tall, stack to 35 ft
Dewatering unit, feed tank and transfer	280	26	covered; wash-down floor with drain
Dried product bunker / bagging	280	26	covered, 3-sided; sized for 3 days of product
Biogas conditioning skid and chiller	288	27	open-sided roof, classified area, 25 ft from ignition sources
MCC / control room	192	18	air-conditioned; 480 V (or 440 V) MCC, PLC, HMI
LPG vaporizer / regulator station (by others)	100	9	tanks outside the pad, 50 ft min. from the dryer per local code
Equipment footprints, total	2,420	225	blocks only
Equipment pad incl. clearances and access	7,680	713	120 ft x 64 ft; roofed area approx. 3,000 sq ft (280 sq m) over dryer train and dewatering
Recommended site allowance	14,500	1,350	approx. 45 m x 30 m: pad, truck loop, LPG tank farm set-back, digestate piping corridor

Utility and interface summary (dewatered feed case, 140 t/day digestate at 8% TS)

Electrical. 480 V / 3 ph / 60 Hz (or 440 V 60 Hz per site), approx. 160 hp connected, 100 kW average running; one feeder to the MCC. Control power 120 V.

Biogas. From digester at <50 mbar; skid blower delivers 2 psig to the burner. Design flow approx. 200 scfm; H₂S must be reduced to <500 ppm before the skid (see biogas skid design).

LPG. New vapor supply, 5 psig at the burner train, sized for the full 10 MMBtu/hr burner when the digester is down (approx. 110 gal/hr liquid at full fire; far less in normal dewatered operation).

Water. Wash-down and dewatering polymer make-up, approx. 2 gpm average, 20 gpm peak; potable quality for polymer.

Compressed air. Instrument air 5 scfm at 90 psig, dry, for burner valves, airlock seals and skid instruments.

Digestate in. Approx. 26,000 gal/day (98 m³/day) at 8% TS, pumped to the dewatering feed tank; centrate returned to the digester or lagoon by others.

Product out. Approx. 13 t/day dried product at 15% moisture; bunker sized for 3 days; truck loading on the east side.

Exhaust. Dryer exhaust via cyclone and stack (35 ft); no wet scrubber included; odor / ammonia control to be reviewed against local permit.

Structures. All equipment on grade on a reinforced concrete pad; cyclone and stack on a steel support; roof over dryer train, dewatering and skid recommended.