


Preliminary plot plan - 140 t/day digestate dryer, LETEK DCG / Bachoco, Merida, Yucatan

Plan view, 1 in = 12 ft (1:144). Pad 124 x 64 ft (38 x 20 m).

MCE-LETEK-LAY-001 Rev 1 - 17 Sep 2026 - PRELIMINARY, FOR SITE PLANNING ONLY

Concrete equipment pad 124 ft x 64 ft = 7,936 sq ft (737 sq m); roof over dryer train, dewatering and skid recommended (Yucatan rain).


Dryer train outline taken from the MCE 8 ft x 40 ft dryer general arrangement; all other items are block estimates.

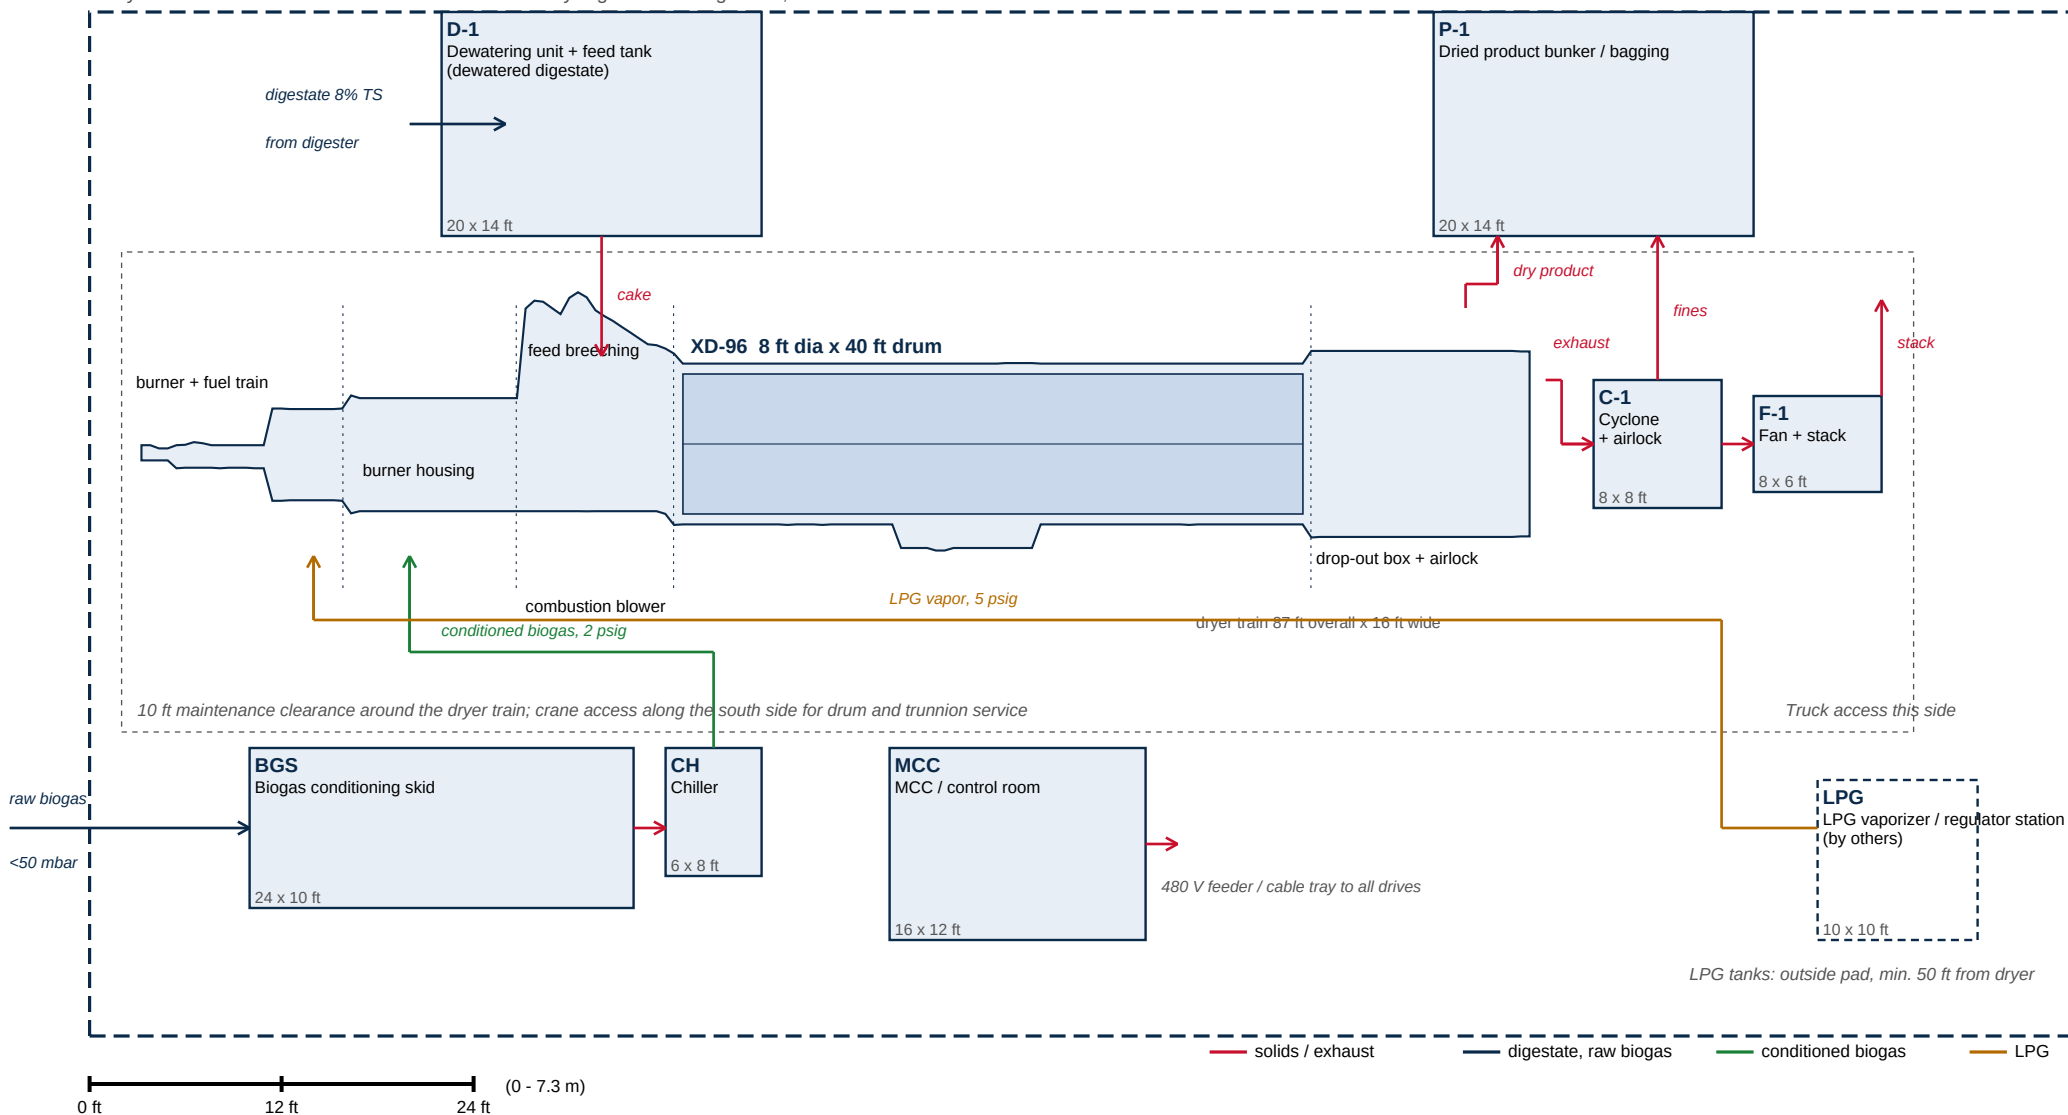

Side elevation, area schedule and utility summary

Elevation from the MCE 8 ft x 40 ft dryer general arrangement, 1 in = 15 ft.

MCE-LETEK-LAY-001 Rev 1 - 17 Sep 2026 - PRELIMINARY, FOR SITE PLANNING ONLY

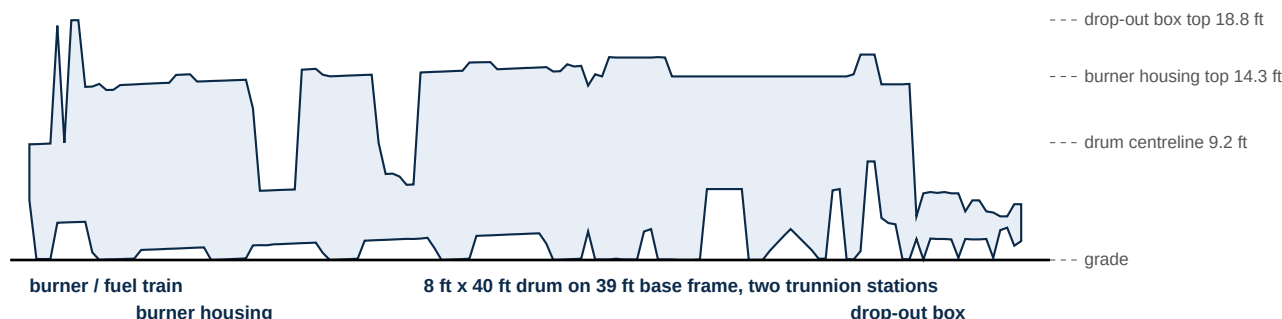

77 ft overall (burner face to drop-out box), 87 ft with fuel train; cyclone, fan and stack not shown

Area	sq ft	sq m	Notes
Dryer train: burner and fuel train, burner housing, feed breeching, 8 ft x 40 ft drum, drop-out box (from drawing 104400900)	1,400	130	87 ft long x 16 ft wide overall; drop-out box top 18.8 ft, drum centreline 9.2 ft above grade; drum and skid 79,900 lb, burner assembly 16,000 lb, drop-out box 9,300 lb
Cyclone and exhaust fan	112	10	cyclone approx. 22 ft tall, stack to 35 ft
Dewatering unit, feed tank and transfer	280	26	covered; wash-down floor with drain
Dried product bunker / bagging	280	26	covered, 3-sided; sized for 3 days of product
Biogas conditioning skid and chiller	288	27	open-sided roof, classified area, 25 ft from ignition sources
MCC / control room	192	18	air-conditioned; 480 V (or 440 V) MCC, PLC, HMI
LPG vaporizer / regulator station (by others)	100	9	tanks outside the pad, 50 ft min. from the dryer per local code
Equipment footprints, total	2,652	246	blocks only
Equipment pad incl. clearances and access	7,936	737	124 ft x 64 ft; roofed area approx. 3,200 sq ft (300 sq m) over dryer train and dewatering
Recommended site allowance	15,100	1,400	approx. 47 m x 30 m: pad, truck loop, LPG tank farm set-back, digestate piping corridor

Utility and interface summary (dewatered feed case, 140 t/day digestate at 8% TS)

Electrical. 480 V / 3 ph / 60 Hz (or 440 V 60 Hz per site), approx. 160 hp connected, 100 kW average running; one feeder to the MCC. Control power 120 V.

Biogas. From digester at <50 mbar; skid blower delivers 2 psig to the burner. Design flow approx. 200 scfm; H₂S must be reduced to <500 ppm before the skid (see biogas skid design).

LPG. New vapor supply, 5 psig at the burner train, sized for the full 10 MMBtu/hr burner when the digester is down (approx. 110 gal/hr liquid at full fire; far less in normal dewatered operation).

Water. Wash-down and dewatering polymer make-up, approx. 2 gpm average, 20 gpm peak; potable quality for polymer.

Compressed air. Instrument air 5 scfm at 90 psig, dry, for burner valves, airlock seals and skid instruments.

Digestate in. Approx. 26,000 gal/day (98 m³/day) at 8% TS, pumped to the dewatering feed tank; centrate returned to the digester or lagoon by others.

Product out. Approx. 13 t/day dried product at 15% moisture; bunker sized for 3 days; truck loading on the east side.

Exhaust. Dryer exhaust via cyclone and stack (35 ft); no wet scrubber included; odor / ammonia control to be reviewed against local permit.

Structures. All equipment on grade on a reinforced concrete pad; cyclone and stack on a steel support; roof over dryer train, dewatering and skid recommended.

Equipment weights. Dryer drum and skid 79,900 lb empty plus up to 19,300 lb of material in the drum when running; burner assembly 16,000 lb; drop-out box 9,300 lb; total dryer train approx. 94,400 lb empty (from the MCE 8 ft x 40 ft dryer weight sheet). Cyclone, fan, dewatering and skid weights to follow with Rev C.